

RTZSTS01

TRAUMA STRAPS

The Ritz Fall Protection Trauma Straps are designed to provide additional support in fall protection systems. They feature a formed pouch for holding the straps and textile loops for easy adjustment at different heights. The straps are lightweight and robust solution for enhanced safety in high-risk environments.




FEATURES

- Features a formed pouch for secure strap holding
- Textile loops allow for easy adjustment at different heights
- Stitched with high-tenacity polyester thread for durability
- Components are deburred and polished for user safety
- Meets or Exceeds ANSI Z359.11-2014

TECH SPECS

Webbing Material	Polyester
Webbing Width	20mm ± 1mm
Webbing Breaking Strength	200 Kgf
Stitching Thread Material	High-tenacity Polyester
Metal Components	Steel
Metal Plating	Zinc Plating
Metal Finish	Deburred & Polished
Weight	110.0gm ± 10 gm

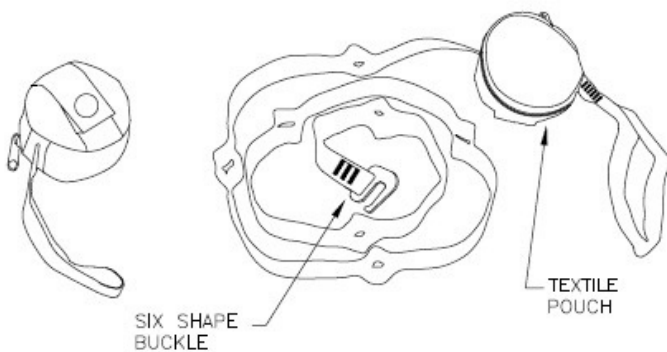

STICHING PATTERN



HOW TO USE

 <p>Un-zip the pouches fitted on both sides of Harness</p> <p>1</p>	 <p>Hold the 2 straps together</p> <p>2</p>
 <p>Connect the straps with each other making a loop with the help of easy-to-use buckle</p> <p>3</p>	 <p>Put your feet into the loop</p> <p>4</p>
 <p>Stand onto the loop, so that the thigh strap are free to move</p> <p>5</p>	 <p>Adjust the sit strap towards the front to release pressure and give a seat-posture</p> <p>6</p>

4. INSPECTION:


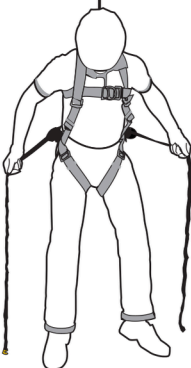

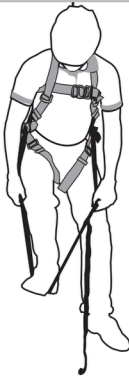


- Regular Inspection is recommended prior to using this with harness.
- It can be used on numerous occasions if it has been inspected prior to use and shows no sign of damage.

5. PRECAUTIONS:

- ÿ Ensure the Medical condition of the user does not affect his safety in normal and emergency use.
- ÿ The equipment shall only be used by a person trained and competent in its safe use.
- ÿ A rescue plan shall be in place to deal with any emergencies that could arise during the work.
- ÿ Ensure that the equipment is compatible with other items when assembled into a system.
- ÿ It is essential to verify free space required beneath the user at work place before each occasion of use so that in case of a fall there will be no collision with ground or other obstacle in the fall path.

6. CAPACITY / USER WEIGHT: SWL or Max user weight - 308.64 lbs.

7. STEPS TO USE:

	Un-zip the pouches fitted on both sides of Harness 1		Hold the 2 straps together 2
	Connect the straps with each other making a loop with the help of easy-to-use buckle 3		Put your feet into the loop 4
	Stand onto the loop, so that the thigh strap are free to move 5		Adjust the sit strap towards the front to release pressure and give a seat-posture 6